

FX Series

FX-101 / FX-102 / FX-103 / FX-105

SPECIFICATIONS

Model	FX-101	FX-102	FX-103	FX-105
Telescope				
Magnification / Resolving power	30x / 2.5"			
Others	Length: 171mm (6.7in.), Objective aperture: 45mm (1.8in.) (48mm (1.9in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.), Reticle illumination: 5 brightness levels			
Angle measurement				
Display resolution	0.5" / 1" (0.0001 / 0.0002gon, 0.002 / 0.005mil)	1" / 5" (0.0002 / 0.001gon, 0.005 / 0.02mil)		
Accuracy (ISO 17123-3:2001)	1"	2"	3"	5"
IACS (Independent Angle Calibration System)	Provided			
Dual-axis compensator / Collimation compensation	Dual-axis liquid tilt sensor, working range: ±6' (±111mgon) / Collimation compensation available			
Distance measurement				
Laser output *1	Reflectorless mode: Class 3R / Prism / sheet mode: Class 1			
Measuring range	Reflectorless*3	0.3 to 500m (1.0 to 1,640ft.)		
(under average conditions*2)	Reflective sheet**4/5	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.), RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.)		
	Mini prisms	CP01: 1.3 to 2,500m (8,200ft.), OR1PA: 1.3 to 500m (1,640ft.)		
	One AP prism	1.3 to 4,000m (4.3 to 13,120ft.) / Under good conditions*6: 5,000m (16,400ft.)		
	Three AP prisms	to 5,000m (16,400ft.) / Under good conditions*6: to 6,000m (19,680ft.)		
Display resolution	Fine/Rapid: 0.001m / 0.01ft. / 1/8in. Tracking: 0.01m / 0.1ft. / 1/2in.			
Accuracy*2	Reflectorless*3	(3 + 2ppm x D) mm**7		
(ISO 17123-4:2001)	Reflective sheet**4	(3 + 2ppm x D) mm		
(D=measuring distance in mm)	AP/CP prism	(2 + 2ppm x D) mm		
Measuring time*8	Fine: 0.9s (initial 1.7s), Rapid: 0.7s (initial 1.4s), Tracking: 0.3s (initial 1.4s)			
OS, Interface and Data management				
Operating system / Application	Microsoft Windows® CE 6.0 / MAGNET Field			
Display / Keyboard	3.5inch, Semi-transmissive TFT QVGA color LCD with LED backlight, Touch screen, Automatic brightness control / 26 keys with backlight			
Control panel location*9	On both faces (Face 2 is only touch screen display)			
Trigger key	On right instrument support			
Data storage	Internal memory	500MB internal memory (includes memory for program files)		
	Plug-in memory device	USB flash memory (max. 8GB)		
Interface	Serial RS-232C, USB2.0 (Type A / mini B)			
Bluetooth modem (Factory option)*10	Bluetooth Class 1, Ver.2.1+EDR, Operating range: up to 300m (980ft.)*11			
General				
Laser-pointer*12	Coaxial red laser using EDM beam			
Guide light*12	Green LED (524nm) and Red LED (626nm), Operating range: 1.3 to 150m (4.3 to 490ft.)*2			
Levels	Graphic	6' (Inner Circle)		
	Circular level	10' / 2mm		
Optical plummet	Magnification: 3x, Minimum focus: 0.3m (11.8in.) from tribrach bottom			
Laser plummet (option)	Red laser diode (635nm±10nm), Beam accuracy: ± 1.0mm@1.3m, Class 2 laser product			
Dust and water protection	IP65 (IEC 60529:2001)			
Operating temperature*13	-20 to +50°C (-4 to +122°F)			
Size with handle*9	Control panel on both faces: W191 x D190 x H348mm (W7.5 x D7.5 x H13.7in.) Control panel on one face: W191 x D174 x H348mm (W7.5 x D6.9 x H13.7in.)			
Weight with battery & tribrach	Approx. 5.7kg (12.6 lb.)			
Power supply				
Battery	BDC70 detachable battery	Li-ion rechargeable battery		
Operating time (20°C)	BDC70	Approx. 20hours (single distance measurement every 30 seconds)		
	External battery**4 (option)	BDC60: approx. 24hours, BDC61: approx. 49hours (single distance measurement every 30 seconds)		

*1 IEC60825-1:Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11 *2 Average conditions: Slight haze, visibility about 20km (12 miles), sunny periods, weak scintillation. *3 Fine mode. With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. *4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target. *5 Measuring range in temperatures of -30 to -20°C (-22 to -4°F) with Low Temperature models and 50 to 60°C (122 to 140°F) with High Temperature models: RS90N-K: 1.3 to 300m (4.3 to 980ft.), RS50N-K: 1.3 to 180m (4.3 to 590ft.), RS10N-K: 1.3 to 60m (4.3 to 190ft.) *6 Good conditions: No haze, visibility about 40km (25 miles), overcast, no scintillation. *7 Measuring range: 0.3 to 200m *8 Typical, under good conditions. Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions. *9 Control panel location may vary depending on region or model. *10 Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance. *11 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity of the instrument, no rain. *12 The laser-pointer and the guide light do not work simultaneously. *13 Low Temperature models: -30 to 50 °C (-22 to 122°F) and High Temperature models: -20 to 60°C (-4 to 140°F, No direct sunlight) are available on built-to-order basis. *14 For FX-101, FX-102 and Low Temperature models.

Standard Accessories

●FX main unit ●Battery (BDC70) ●Battery charger (CDC68) ●Power Cable ●Lens cap ●Lens hood ●Tool pouch
●Screwdriver ●Lens brush ●Adjusting pin x2 ●Cleaning cloth ●Operation manual ●USB memory ●Laser caution sign-board
●Carrying case ●Carrying strap



- Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
- Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

Your local Authorized Dealer is:

www.topcon.co.jp

75-1, HASUNUMA-CHO, ITABASHI-KU, TOKYO, 174-8580 JAPAN

TOPCON SOKKIA INDIA PVT. LTD.
C-25, GROUND FLOOR, SECTOR-8,
NOIDA, U.P. - 201 301
www.topconsokkia.ind.in

Specifications subject to change without notice

©2012 Topcon Corporation All rights reserved. P-H2-1 TSI

SOKKIA


FX Series

Functional X-ellence Station

Totally Functional

- Windows® CE is Ready in a Lightweight, Compact Body
- MAGNET™ Field On-Board Application Software
- RED-tech Technology Reflectorless EDM
- LongLink Data Communication*
- Advanced Angle Measurement System
- Long-lasting Battery
- Waterproof, Rugged, and Operator Friendly

*Offered as a factory option.

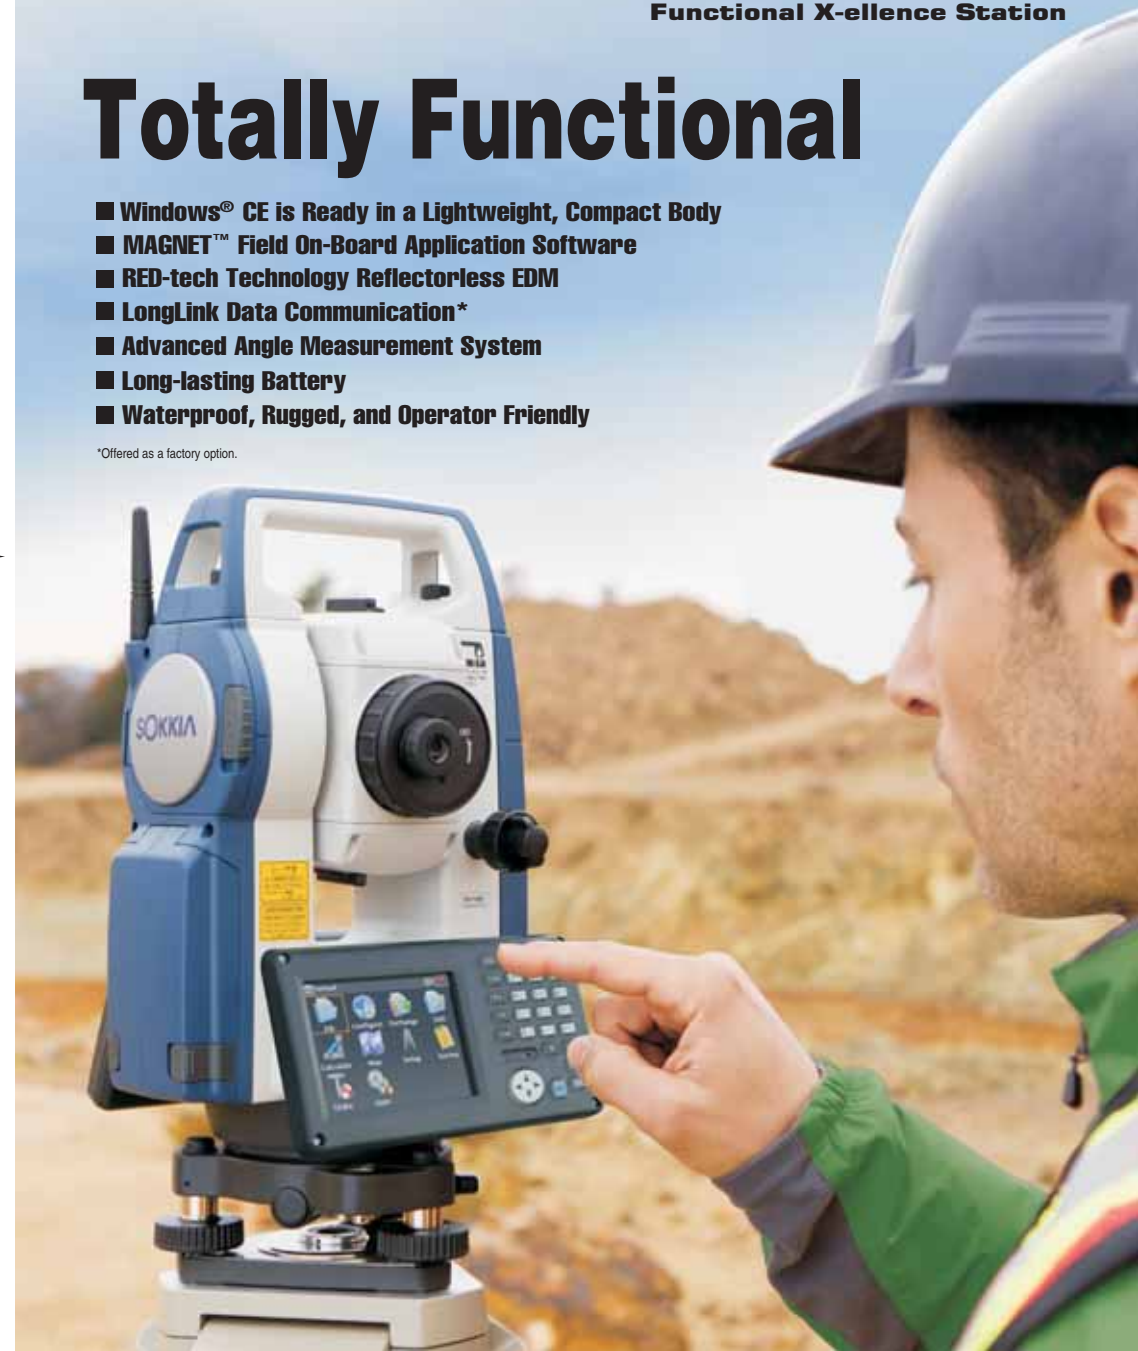

The FX Total Station Offers High Performance in a Compact Size.

■ Windows® CE is Ready in a Lightweight, Compact Body

- Windows® CE 6.0 provides a comfortable operating environment.
- Completely new onboard application "MAGNET™ Field" is installed as standard feature.

■ MAGNET™

● Cloud-based Solutions for Precise Positioning

MAGNET™ is a software family that uses the "cloud" to seamlessly connect data in the field and office. Real-time connections. When you need it. Where you need it. For data exchange, communications, asset tracking and more.


● MAGNET™ Field

Data collection, stakeout, roads, and coordinate geometry.




■ RED-tech Technology Reflectorless EDM

- Fast distance measurement of 0.9s regardless of object.
- SOKKIA traditional pinpoint precision in reflectorless distance measurement.
- Reflectorless operation from 30cm to 500m.
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming.
- Ensures accuracy even with reflective sheets.

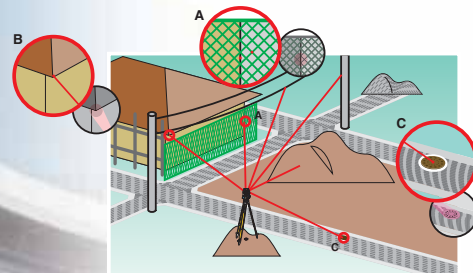

The ultra-narrow EDM beam can precisely measure walls, corners, manholes on the road surface, even chain-link fences and tree branches.

■ LongLink Data Communication*

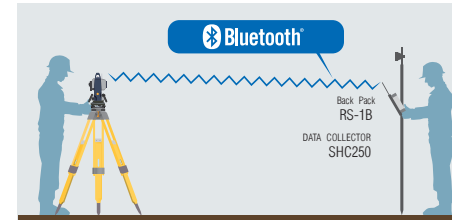

- The FX series of total stations features **Bluetooth®** Class1 wireless technology for reliable data communications.
- All FX data is instantly available at the Bluetooth-equipped controller.

*Offered as a factory option.

■ Advanced Angle Measurement System

- FX features SOKKIA's original absolute encoders that provide long-term reliability in any job site condition. Dual-axis compensator ensures stable measurements even when setup on uneven terrain.
- Sokkia's traditional motion clamp and tangent screw are employed to ensure stable angle measurement.
- FX-101 and FX-102 feature groundbreaking IACS (Independent Angle Calibration System) technology for extremely reliable angle measurement.



■ Long-lasting Battery

- Uses the same high capacity battery as MDTs and GNSS.
- One battery provides 20 hours of power.



■ Waterproof, Rugged, and Operator Friendly

- IP65 dustproof / waterproof rating.
- Metal chassis and heavy duty handle.
- Standard usage temperature range -20 to +50°C. Low temperature models can be used as low as -30°C¹ and high temperature models up to +60°C.²



- New star key (★) instantly brings up functions.
- Trigger key lets you take a series of measurements without taking your eye off the telescope.
- Control panel consists of 10-key pad with color LCD touch screen display.²
- USB type A / mini B as well as serial ports.



- Green / Red telescope guide light enhances work efficiency in a range up to 150m.



- Built-in laser plummet with five brightness levels is equipped for quick instrument setting in all lighting conditions.³

¹ Low and High temperature models available as options.

² Face 2 is only touch screen display. Control panel location may vary depending on region or model.

³ Offered as an option in some areas.